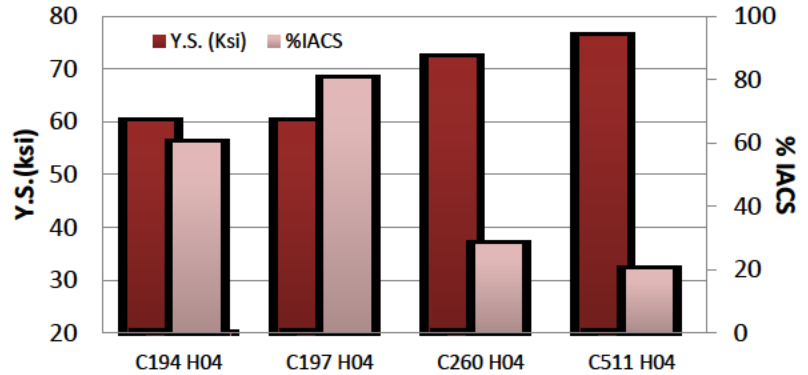


A second generation High Performance Alloy developed by Olin Brass, C197 offers strength and formability similar to C194 but with higher electrical and thermal conductivity. High conductivity allows C197 to replace traditional brasses and bronzes in applications where high current-carrying capacity is required. For applications with prolonged exposed to elevated temperatures designers should also consider C19720 for improved resistance to stress relaxation. For more information contact Olin Brass Market Development Engineering at 618-258-5255, OlinBrass.com or email us at info@olinbrass.com.

**Chemical Composition**

<b>Copper<sup>1</sup></b>	<b>Remainder</b>
<b>Iron</b>	<b>0.30-1.2%</b>
<b>Magnesium</b>	<b>0.01-0.2%</b>
<b>Phosphorus</b>	<b>0.10-0.40%</b>
<b>Cobalt</b>	<b>0.05% Max</b>
<b>Lead</b>	<b>0.05% Max</b>
<b>Manganese</b>	<b>0.05% Max</b>
<b>Nickel</b>	<b>0.05% Max</b>
<b>Tin</b>	<b>0.20% Max</b>
<b>Zinc</b>	<b>0.20% Max</b>



**Figure 1:** Comparison of Tensile Strength and Electrical Conductivity performance of select connector materials

**Physical Properties**

	English Units	Metric Units
Density	0.319 lb/in <sup>3</sup> @ 68°F	8.84 g/cm <sup>3</sup>
Thermal Conductivity	185 BTU-ft/ft <sup>2</sup> -hr-°F	320 W/m <sup>2</sup> K
Electrical Resistivity	13.0 ohm circ mils/ft	2.16 microhm-cm
Electrical Conductivity (annealed)	80% IACS*	0.464 megamho/cm
Electrical Conductivity (rolled)	77% IACS*	0.447 megamho/cm
Modulus of Elasticity	17,200,000 psi	121 kN/mm <sup>2</sup>
Coeff. Of Thermal Expansion 68-572°F (20-300°C)	9.6 PPM/°F	17.28 PPM/°C

\*International Annealed Copper Standard

**Mechanical Properties**

Temper <sup>1</sup>	Tensile Strength		Yield Strength <sup>2</sup>		% Elongation <sup>2</sup>	Typical 90° Bend Formability GW/BW <sup>3</sup>	
	ksi	N/mm <sup>2</sup>	ksi	N/mm <sup>2</sup>			
Annealed	43-53	296-366	23	160	20 min.	-	-
1/2 Hard	53-63	365-435	48	330	17	0.5	0.5
Hard	60-70	415-483	60	415	7	1.0	1.0
Extra Hard	67-73	460-505	67	460	6	1.5	1.8
Spring Hard	70-76	485-525	70	485	5	2.0	2.5
Extra Spring	73-80	505-550	73	505	1 min.		

<sup>1</sup> Mechanical properties subject to change. All tempers listed are made to a Tensile Strength specification unless otherwise noted.

<sup>2</sup> Nominal Values      <sup>3</sup> DATA FOR REFERENCE ONLY. R/T = Bend Radius/Material Thickness <0.016" (0.4mm) thick, 11/16 (17.5mm) wide.

**Olin Brass Headquarters**  
4801 Olympia Park  
Plaza, Suite 3500  
Louisville, KY 40241  
Ph: 502-873-3000

**GBC METALS ASIA PACIFIC PTE LTD**  
1 Kim Seng Promenade  
Great World City, E Tower  
Singapore 237994  
Ph: 65.6238.1155

**GBC METALS LLC SHANGHAI**  
Room 2004 Aetna Tower  
No. 107 Zunyi Rd  
Shanghai 200051 China  
Ph: 86.21.6237.5898

**OLIN BRASS-HEADQUARTERS**

4801 Olympia Park  
Plaza, Suite 3500  
Louisville, KY 40241  
Ph: 502-873-3000

**OLIN BRASS - MILL**

285 Lewis & Clark Blvd.  
East Alton, IL 62024  
Ph: 618-258-5255

**BRYAN METALS INC.**

1103 South Main Street  
Bryan OH 43506-0487  
Ph: 419-636-4571  
Fx: 419-636-3994

**SOMERS THIN STRIP**

215 Piedmont Street  
Waterbury, CT 06706  
Ph: 203-597-5000  
Fx: 203-597-5081

**A.J. OSTER COMPANY**

180 ALEXANDRA WAY  
Carol Stream, IL 60188-2068  
Ph: 630-260-1040  
Ph: 800-323-9644  
Fx: 630-260-1102

**A.J. OSTER CARIBE, INC.**

Centro industrial Rio Canas  
Lote 29, P.M.B HC-01  
Box 29030  
Caguas, PR 00725  
Ph: 787-747-7575

**A.J. OSTER FOILS, INC.**

2081 McCrea Street  
Alliance, OH 44601-2793  
Ph: 330-823-1700  
Ph: 800-321-9750  
Fx: 330-823-1705

**A.J. OSTER WEST INC.**

22833 La Palma Avenue  
Yorba Linda, CA 92887-4767  
Ph: 714-692-1000  
Ph: 800-933-5933  
Fx: 714-692-1225

**A.J. OSTER COMPANY**

457 Industrial Drive  
Warwick, RI 02886  
Ph: 401-739-0800  
Fx: 401-739-1276

**INTERNATIONAL SALES OFFICES & FACILITIES****GBC METALS ASIA PACIFIC PTE LTD.**

1 Kim Seng Road Promenade  
Great World City, East Tower #13-04  
Singapore 237994  
Ph: 65.6238.1155  
Fx: 65.6238.0660

**GBC METALS LLC SHANGHAI**

Room 2004, Aetna Tower  
No. 107 Zunyi Road  
Shanghai 200051, China  
Ph: 86.21.6237.5898  
Fx: 86.21.6237.5805

**OLIN LUOTONG METALS (GZ) Co Ltd**

No. 8 Jung Gong Road, East District  
Guangzhou Economic Technological & Dev District  
Guangzhou, P.R. China 510530  
Ph: 86.20.8226.6818  
Fx: 86.20.8226.6718

**DOWA-OLIN METAL CORPORATION**

2630, Shingai  
Iwata-shi, Shiznoka-ken  
438, Japan  
Ph: 81.538.37.5111  
Fx: 81.538.37.0147

**OLIN BRASS - INTERNATIONAL DISTRIBUTORS****UNITED KINGDOM / IRELAND****Aurubis UK Ltd.**

Rabone Park, Smethwick  
West Midlands B66 2NN  
England  
Ph: 44 (0) 121 555 1199  
Fx: 44 (0) 121 555 1188  
Email: info-uk@aurubis.com  
Website: www.aurubis.com

**EUROPE****Walter Türkis GmbH**

Struthstrasse 35  
55743 Idar-Oberstein  
Germany  
Ph: 49 (0) 6781 62-0  
Fx: 49 (0) 6781 62-28  
Email: service@tuerkis-schneid-center.de  
Website: www.tuerkis-schneid-center.de

**OLIN BRASS MEXICO S.A. de CV**

Av. La Griega # 117  
Parque Industrial Queretaro  
Santa Rosa, Jaurgui  
Queretaro, Mexico 76220  
Ph: 52 442 2 29 40 00  
Fx: 52 442 2 29 40 29