

Alloy C752 is an excellent choice for designers considering both functional and decoration applications. Offering a combination of strength, ductility and moderately high work-hardening rate C752 is widely used as both a deep drawing and spring alloy. The added advantage of having a silvery-white color almost identical to that of silver or stainless steel makes C752 valuable for a variety of applications including; flatware, jewelry, medallions and antimicrobial touch surfaces. For more information contact Olin Brass Market Development Engineering at 618-258-5255, OlinBrass.com or email us at info@olinbrass.com.

Chemical Composition

Copper¹	63.0-66.5%
Nickel²	16.5-19.5%
Zinc	Remainder
Iron	0.25% Max
Lead	0.05% Max
Manganese	0.50% Max

¹ Cu includes Ag; Copper plus named elements = 99.5%

² Ni Values Include Co

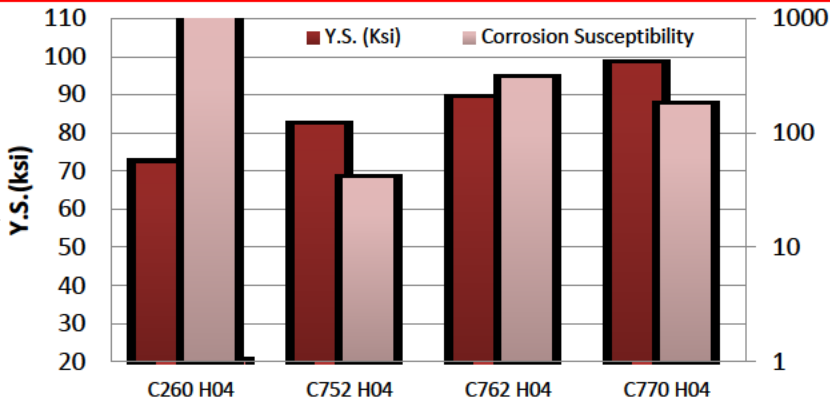


Figure 1: Comparison of Yield Strength and relative susceptibility to stress corrosion (Mattsson's solution and moist ammonia, 1000 = most susceptible).

Physical Properties

	English Units	Metric Units
Density	0.316 lb/in ³ @ 68°F	8.73 g/cm ³
Thermal Conductivity	19 BTU-ft/ft ² -hr-°F	33 W/m°K
Electrical Resistivity	173 ohm circ mils/ft	28.7 microhm-cm
Electrical Conductivity (annealed)	6% IACS*	0.0348 megamho/cm
Modulus of Elasticity	18,000,000 psi	124 kN/mm ²
Thermal Capacity(Specific Heat)	0.090 Btu/lb/F° @ 68°F	377.1 J/kg · °C @ 20°C
Coeff. Of Thermal Expansion 68-572°F (20-300°C)	9.0 PPM/°F	16.2 PPM/°C

*International Annealed Copper Standard

Mechanical Properties

Temper ¹	Tensile Strength		Yield Strength ²		% Elongation ²	Typical 90° Bend Formability GW/BW ³	
	ksi	N/mm ²	ksi	N/mm ²			
Annealed	53-63	365-435	25	170	35	-	-
1/4 Hard	58-72	400-495	45	310	24	-	0.5
1/2 Hard	66-80	455-550	63	435	14	0.5	0.8
3/4 Hard	74-86	510-595	75	515	8	1.0	1.0
Hard	78-91	540-625	82	565	5	1.5	1.5
Extra Hard	86-98	595-675	91	625	3	2.0	2.0
Spring	90-101	620-695	93	640	1 min	4.0	4.0
Extra Spring	96 min	660 min	95 min	655 min	2 Max		

¹ Mechanical properties subject to change. All tempers listed are made to a Tensile Strength specification unless otherwise noted.

² Nominal Values ³ DATA FOR REFERENCE ONLY. R/T = Bend Radius/Material Thickness <0.016" (0.4mm) thick, 11/16 (17.5mm) wide.

Olin Brass Headquarters
4801 Olympia Park
Plaza, Suite 3500
Louisville, KY 40241
Ph: 502-873-3000

GBC METALS ASIA PACIFIC PTE LTD
1 Kim Seng Promenade
Great World City, E Tower
Singapore 237994
Ph: 65.6238.1155

GBC METALS LLC SHANGHAI
Room 2004 Aetna Tower
No. 107 Zunyi Rd
Shanghai 200051 China
Ph: 86.21.6237.5898

OLIN BRASS-HEADQUARTERS

4801 Olympia Park
Plaza, Suite 3500
Louisville, KY 40241
Ph: 502-873-3000

OLIN BRASS - MILL

285 Lewis & Clark Blvd.
East Alton, IL 62024
Ph.: 618-258-5255

BRYAN METALS INC.

1103 South Main Street
Bryan OH 43506-0487
Ph: 419-636-4571
Fx: 419-636-3994

SOMERS THIN STRIP

215 Piedmont Street
Waterbury, CT 06706
Ph: 203-597-5000
Fx: 203-597-5081

A.J. OSTER COMPANY

180 ALEXANDRA WAY
Carol Stream, IL 60188-2068
Ph: 630-260-1040
Ph: 800-323-9644
Fx: 630-260-1102

A.J. OSTER CARIBE, INC.

Centro industrial Rio Canas
Lote 29, P.M.B HC-01
Box 29030
Caguas, PR 00725
Ph: 787-747-7575

A.J. OSTER FOILS, INC.

2081 McCrea Street
Alliance, OH 44601-2793
Ph: 330-823-1700
Ph: 800-321-9750
Fx: 330-823-1705

A.J. OSTER WEST INC.

22833 La Palma Avenue
Yorba Linda, CA 92887-4767
Ph: 714-692-1000
Ph: 800-933-5933
Fx: 714-692-1225

A.J. OSTER COMPANY

457 Industrial Drive
Warwick, RI 02886
Ph: 401-739-0800
Fx: 401-739-1276

INTERNATIONAL SALES OFFICES & FACILITIES**GBC METALS ASIA PACIFIC PTE LTD.**

1 Kim Seng Road Promenade
Great World City, East Tower #13-04
Singapore 237994
Ph: 65.6238.1155
Fx: 65.6238.0660

GBC METALS LLC SHANGHAI

Room 2004, Aetna Tower
No. 107 Zunyi Road
Shanghai 200051, China
Ph: 86.21.6237.5898
Fx: 86.21.6237.5805

OLIN LUOTONG METALS (GZ) Co Ltd

No. 8 Jung Gong Road, East District
Guangzhou Economic Technological & Dev District
Guangzhou, P.R. China 510530
Ph: 86.20.8226.6818
Fx: 86.20.8226.6718

DOWA-OLIN METAL CORPORATION

2630, Shingai
Iwata-shi, Shiznoka-ken
438, Japan
Ph: 81.538.37.5111
Fx: 81.538.37.0147

OLIN BRASS - INTERNATIONAL DISTRIBUTORS**UNITED KINGDOM / IRELAND****Aurubis UK Ltd.**

Rabone Park, Smethwick
West Midlands B66 2NN
England
Ph: 44 (0) 121 555 1199
Fx: 44 (0) 121 555 1188
Email: info-uk@aurubis.com
Website: www.aurubis.com

EUROPE**Walter Türkis GmbH**

Struthstrasse 35
55743 Idar-Oberstein
Germany
Ph: 49 (0) 6781 62-0
Fx: 49 (0) 6781 62-28
Email: service@tuerkis-schneid-center.de
Website: www.tuerkis-schneid-center.de

OLIN BRASS MEXICO S.A. de CV

Av. La Griega # 117
Parque Industrial Queretaro
Santa Rosa, Jaurgui
Queretaro, Mexico 76220
Ph: 52 442 2 29 40 00
Fx: 52 442 2 29 40 29